

Workhorse Belt Drive

230V

Key Features

- Cast iron blocks on all models
- Air receivers built to latest European standards 2014/29EU
- Heavy duty industrial motors c/w overload protection
- Twin cylinder pumps
- Fitted aftercoolers
- Aerodynamic flywheels for efficient cooling
- Slow running pump speeds giving lower noise levels & longer life expectancy
- Automatic stop/start controls
- Full back up by our factory trained engineers
- Built & tested to latest European standards in our modern production facility in Manchester, England
- 2 year conditional warranty



WR3HP-50P-1



WR3HP-100P-1

Order Code	HP	Tank Litres	Displacement CFM	FAD CFM	Electrical Phase	Dimensions mm L x W x H
WR3HP-50P-1	3.0	50	13	9	1	1010 x 360 x 730
WR3HP-100P-1	3.0	100	13	9	1	1100 x 400 x 830



WR3HP-150S-1



WR3HP-200S-1

Order Code	HP	Tank Litres	Displacement CFM	FAD CFM	Electrical Phase	Dimensions mm L x W x H
WR3HP-150S-1	3.0	150	13	9	1	1350 x 540 x 1040
WR3HP-200S-1	3.0	200	13	9	1	1520 x 540 x 1040

All above models 10 bar maximum pressure

Workhorse Belt Drive

230V • 400V



WR3HPXX-150S-1



WR3HPXX-200S-1

Order Code	HP	Tank Litres	Displacement CFM	FAD CFM	Electrical Phase	Dimensions mm L x W x H
WR3HPXX-150S	3.0	150	14	10.7	1/3	1350 x 540 x 1075
WR3HPXX-200S	3.0	200	14	10.7	1/3	1520 x 540 x 1040
WR4HP-200S-1*	4.0	200	17.7	13.2	1	1520 x 540 x 1050

*Requires 30 Amp Power Supply

Key Features

- Twin cylinder pumps
- Fitted aftercoolers
- Cast iron blocks on all models
- Automatic stop/start controls
- Air receivers built to latest European standards 2014/29EU
- Heavy duty industrial motors c/w overload protection
- Aerodynamic flywheels for efficient cooling
- Slow running pump speeds giving lower noise levels & longer life expectancy
- Full back up by our factory trained engineers
- Built & tested to latest European standards in our modern production facility in Manchester, England
- 2 year conditional warranty



WRN5.5HP-200S

Order Code	HP	Tank Litres	Displacement CFM	FAD CFM	Electrical Phase	Dimensions mm L x W x H
WRN5.5HP-200S	5.5	200	21	17	3	1520 x 480 x 940
WRN5.5HP-270S	5.5	270	21	17	3	1600 x 500 x 1040
WRN5.5HPXX-200S	5.5	200	23	18.5	3	1520 x 480 x 975
WRN5.5HPXX-270S	5.5	270	23	18.5	3	1600 x 500 x 1075


All above models 10 bar maximum pressure

Workhorse Belt Drive

400V



WRN7.5HP-270S

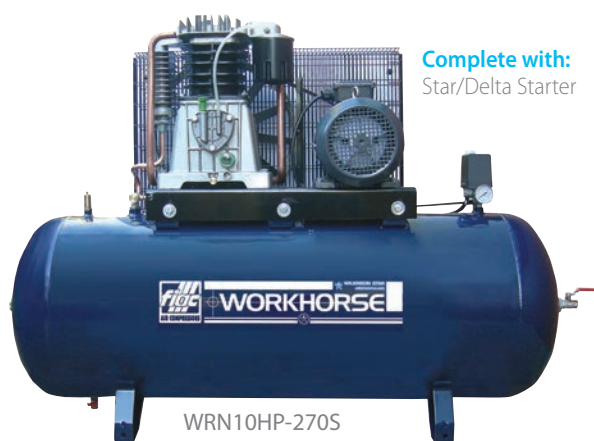

WRN10HP-270S

Complete with:
Star/Delta Starter

Order Code	HP	Tank Litres	Displacement CFM	FAD CFM	Electrical Phase	Dimensions mm L x W x H
WRN7.5HP-270S	7.5	270	29	23	3	1600 x 500 x 1040
WRN10HP-270S	10	270	38.5	29.5	3	1600 x 500 x 1200

Workhorse Tandem Belt Drive

230V



WRT28-250S-1



WRT36-250S-1

Complete with: Three position starter box

Order Code	HP	Tank Litres	Displacement CFM	FAD CFM	Electrical Phase	Dimensions mm L x W x H
WRT28-250S-1*	2 x 3.0	250	28	18	1	1750 x 480 x 1100
WRT30-250S-1*	2 x 3.0	250	28.2	21.4	1	1750 x 480 x 1100
WRT36-250S-1**	2 x 4.0	250	36.4	26.4	1	1750 x 480 x 1200

*Requires 30 Amp power supply

**Requires 45 Amp power supply

All above models 10 bar maximum pressure